


Brochure Design: GK Design Soken Hiroshima Inc. 2015.11

| Aisle width (unit: mm) | | Pallet length: L, Pallet width: W | | *The table below indicates the value during AWC (small turn radius control) "Stacking Mode". | | | | | | | | | | |
|------------------------|--------------------|-----------------------------------|--------------------|--|-------|-------|-------|-------|--|-------|-------|-------|-------|-------|
| Model | Type | Mast | Battery | Intersecting (IA) and Right-angle aisle width | | | | | Right-angle stacking (SA) aisle width *1 | | | | | |
| | | | | L | 800 | 1,000 | 1,000 | 1,000 | 1,100 | 800 | 1,000 | 1,000 | 1,000 | 1,100 |
| 1.0 ton | 8FBR10 S(J)XII | typeS Front (side) | Standard/Semi-free | 201 (front) | 1,550 | 1,560 | 1,570 | 1,610 | 1,570 | 2,060 | 2,210 | 2,230 | 2,250 | 2,320 |
| | | | | 201 (side), 260 | 1,550 | 1,560 | 1,570 | 1,610 | 1,570 | 2,070 | 2,220 | 2,240 | 2,270 | 2,330 |
| | | | | 280-370 | 1,560 | 1,560 | 1,570 | 1,610 | 1,580 | 2,130 | 2,290 | 2,310 | 2,330 | 2,400 |
| | | | | 201, 260 | 1,560 | 1,560 | 1,570 | 1,610 | 1,580 | 2,100 | 2,250 | 2,270 | 2,290 | 2,360 |
| | | | | 280-370 | 1,560 | 1,560 | 1,570 | 1,610 | 1,580 | 2,160 | 2,320 | 2,330 | 2,360 | 2,430 |
| | | | | 201, 260 | 1,560 | 1,560 | 1,570 | 1,610 | 1,580 | 2,100 | 2,250 | 2,270 | 2,290 | 2,360 |
| 1.25 ton | 8FBR13 S(J)XII | typeS Front (side) | Standard/Semi-free | 201 (front) | 1,630 | 1,630 | 1,640 | 1,690 | 1,650 | 2,060 | 2,210 | 2,230 | 2,260 | 2,320 |
| | | | | 201 (side), 260 | 1,630 | 1,630 | 1,640 | 1,690 | 1,650 | 2,070 | 2,220 | 2,240 | 2,270 | 2,330 |
| | | | | 280-370 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,140 | 2,290 | 2,310 | 2,330 | 2,400 |
| | | | | 201, 260 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,100 | 2,250 | 2,270 | 2,290 | 2,360 |
| | | | | 280-370 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,160 | 2,320 | 2,330 | 2,360 | 2,430 |
| | | | | 201, 260 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,100 | 2,250 | 2,270 | 2,290 | 2,360 |
| 1.35 ton | 8FBR14 S(J)XII | typeS Front (side) | Standard/Semi-free | 201 (front) | 1,630 | 1,630 | 1,640 | 1,690 | 1,650 | 2,060 | 2,210 | 2,230 | 2,260 | 2,320 |
| | | | | 201 (side), 260 | 1,630 | 1,630 | 1,640 | 1,690 | 1,650 | 2,070 | 2,220 | 2,240 | 2,270 | 2,330 |
| | | | | 280-370 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,140 | 2,290 | 2,310 | 2,330 | 2,400 |
| | | | | 201, 260 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,100 | 2,250 | 2,270 | 2,290 | 2,360 |
| | | | | 280-370 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,160 | 2,320 | 2,330 | 2,360 | 2,430 |
| | | | | 201, 260 | 1,640 | 1,640 | 1,650 | 1,690 | 1,650 | 2,100 | 2,250 | 2,270 | 2,290 | 2,360 |
| 1.5 ton | 8FBR15 C(J)XII | typeC Front (side) | Standard/Semi-free | 260 | 1,690 | 1,690 | 1,700 | 1,740 | 1,700 | 2,090 | 2,230 | 2,250 | 2,280 | 2,340 |
| | | | Full-free | 260 | 1,690 | 1,690 | 1,700 | 1,740 | 1,700 | 2,100 | 2,250 | 2,270 | 2,300 | 2,360 |
| | | | 3-stage full-free | 260 | 1,690 | 1,690 | 1,700 | 1,740 | 1,700 | 2,100 | 2,250 | 2,270 | 2,300 | 2,360 |
| | 8FBR15 S(J)XII | typeS Front (side) | Standard/Semi-free | 280-370 | 1,690 | 1,690 | 1,700 | 1,740 | 1,700 | 2,140 | 2,290 | 2,310 | 2,330 | 2,400 |
| | | | 2-stage full-free | 280-370 | 1,690 | 1,690 | 1,700 | 1,740 | 1,710 | 2,160 | 2,320 | 2,330 | 2,360 | 2,430 |
| | | | 3-stage full-free | 280-370 | 1,690 | 1,690 | 1,700 | 1,740 | 1,710 | 2,160 | 2,320 | 2,330 | 2,360 | 2,430 |
| 8FBR15 A(J)XII | typeA Front (side) | Standard/Semi-free | 280-370 | 1,800 | 1,790 | 1,800 | 1,840 | 1,810 | 2,140 | 2,290 | 2,310 | 2,340 | 2,400 | |
| | | 2-stage full-free | 280-370 | 1,800 | 1,790 | 1,800 | 1,850 | 1,810 | 2,190 | 2,360 | 2,370 | 2,390 | 2,470 | |
| | | 3-stage full-free | 280-370 | 1,800 | 1,790 | 1,800 | 1,850 | 1,810 | 2,190 | 2,360 | 2,370 | 2,390 | 2,470 | |
| 8FBR15 W(J)XII | typeW Front (side) | 3-stage full-free | 280-370 | 1,850 | 1,850 | 1,850 | 1,870 | 1,860 | 2,190 | 2,360 | 2,370 | 2,390 | 2,470 | |
| 1.8 ton | 8FBR18 S(J)XII | typeS Front (side) | Standard/Semi-free | 280-370 | 1,800 | 1,790 | 1,800 | 1,840 | 1,810 | 2,140 | 2,290 | 2,310 | 2,340 | 2,400 |
| | | | 2-stage full-free | 280-370 | 1,800 | 1,790 | 1,800 | 1,850 | 1,810 | 2,190 | 2,360 | 2,370 | 2,390 | 2,470 |
| | | | 3-stage full-free | 280-370 | 1,800 | 1,790 | 1,800 | 1,850 | 1,810 | 2,190 | 2,360 | 2,370 | 2,390 | 2,470 |
| | 8FBR18 A(J)XII | typeA Front (side) | Standard/Semi-free | 280-370 | 1,820 | 1,820 | 1,830 | 1,870 | 1,840 | 2,170 | 2,320 | 2,340 | 2,370 | 2,430 |
| | | | 2-stage full-free | 280-370 | 1,820 | 1,820 | 1,830 | 1,870 | 1,840 | 2,220 | 2,390 | 2,400 | 2,420 | 2,500 |
| | | | 3-stage full-free | 280-370 | 1,820 | 1,820 | 1,830 | 1,870 | 1,840 | 2,220 | 2,390 | 2,400 | 2,420 | 2,500 |
| 8FBR18 W(J)XII | typeW Front (side) | 3-stage full-free | 280-370 | 1,850 | 1,850 | 1,850 | 1,870 | 1,860 | 2,190 | 2,360 | 2,370 | 2,390 | 2,470 | |

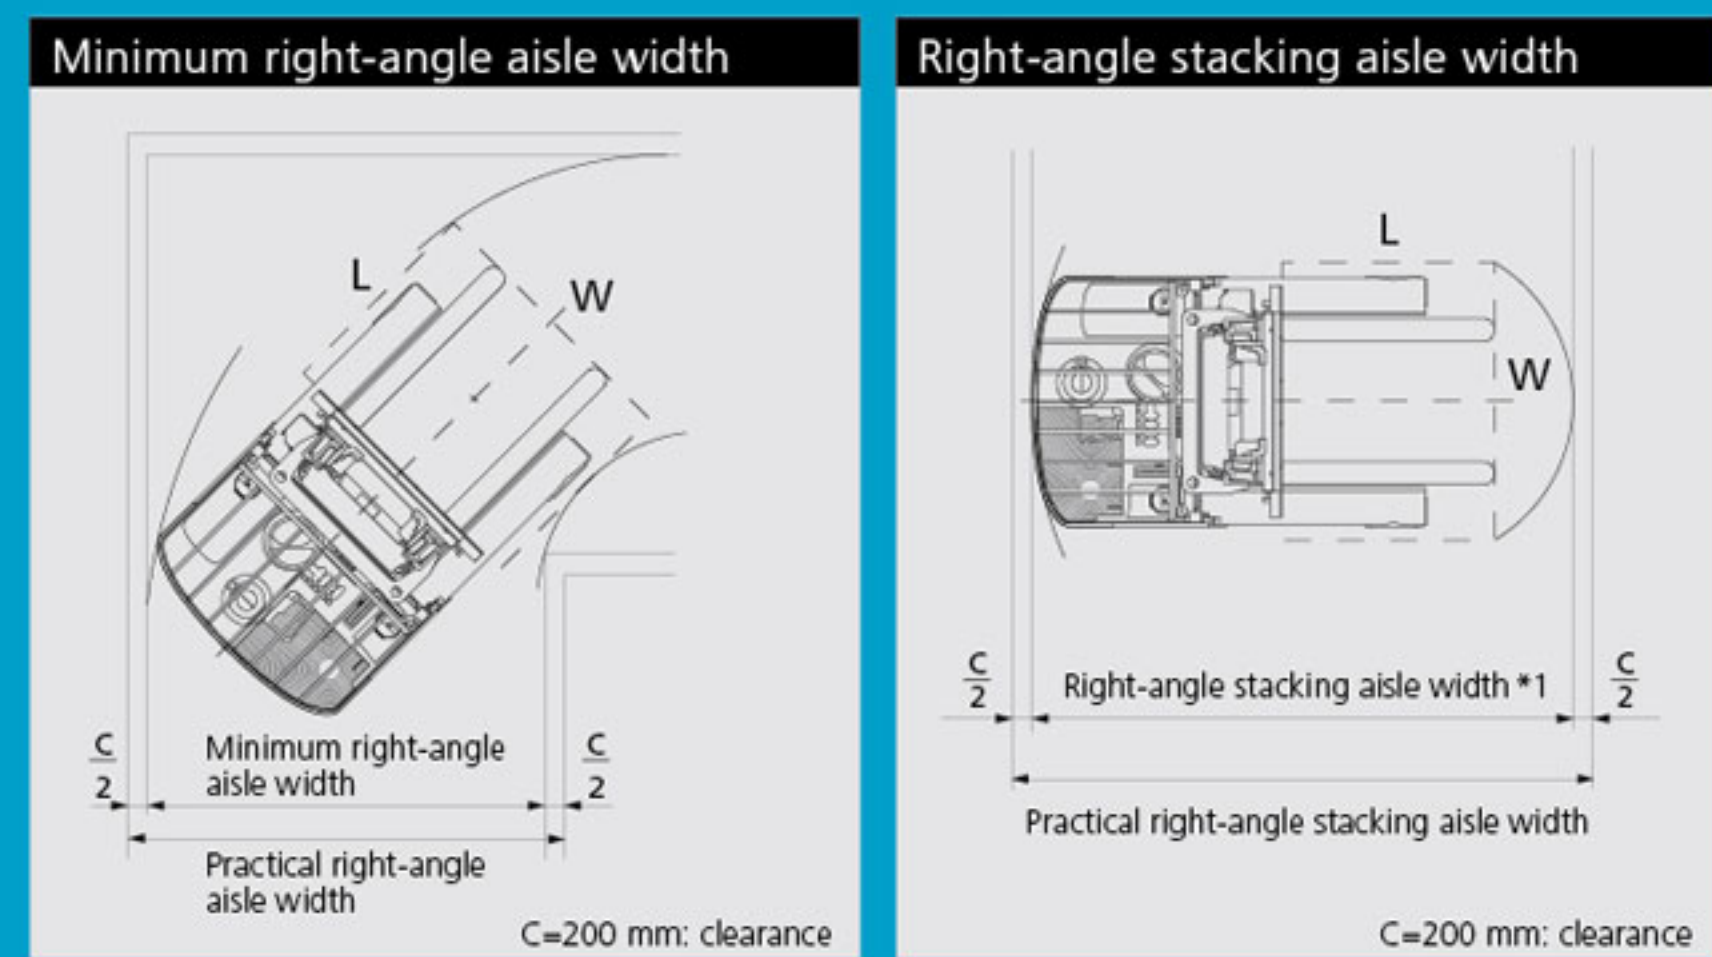

*1: Figure does not include the turning capacity of 200 mm in the practical right-angle stacking aisle width.

For the forklift driver operations, inspection and maintenance, always read the instruction manual and follow the instructions correctly.



Manufactured by
SUMITOMO NACCO FORKLIFT CO.,LTD.
 2-75, Daitoh-cho, Obu-shi, Aichi-ken, 474-8555 JAPAN
 Phone: 81-562-48-5251 Fax: 81-562-48-5396

We offer personalized after service and looking forward to see you.

QuaPro-R

Electric Reach Forklift Trucks

1.0 TON — 1.8 TON

- 8FBR 10 · 13 · 14 · 15 · 18 S(J)XII
- 8FBR 15 C(J)XII
- 8FBR 15 · 18 A(J)XII
- 8FBR 15 · 18 W(J)XII

The 4 "PRO" in response to the customer's voice.
 QuaPro-R has greatly advanced in load handling operations.

PROFESSIONAL
 PRODUCTIVE
 PROFITABLE
 PROGRESSIVE

Quad



SUMITOMO NACCO FORKLIFT SALES CO.,LTD.
 2-18, Heiwajima 3-chome, Ota-ku, Tokyo, 143-0006 JAPAN
 Phone: 81-3-6404-3262 Fax: 81-3-6404-3272

CODE
 ER-01E

*The actual features and specifications may differ from those described in the catalog.
 *The color of the photographs in this catalog may differ slightly from the actual color depending on the ink quality.




Specifications


| Item/Symbol | | | Model/Type/Battery Pullout type | | 1.0 ton | | 1.25 ton | | 1.35 ton | | 1.5 ton | | | | 1.8 ton | | | | | | | |
|--------------------------------|-----------------------------|---------------|---------------------------------|----------|------------------|----------|--------------------|----------|--------------------|----------|--------------------|----------|--------------------|----------|--------------------|----------|--------------------|----------|--------------------|-------|----------------|--|
| | | | 8FBR10 S(J)XII | | 8FBR13 S(J)XII | | 8FBR14 S(J)XII | | 8FBR15 C(J)XII | | 8FBR15 S(J)XII | | 8FBR15 A(J)XII | | 8FBR15 W(J)XII | | 8FBR18 S(J)XII | | 8FBR18 A(J)XII | | 8FBR18 W(J)XII | |
| | | | type S | | type S | | type S | | type C | | type S | | type A | | type W | | type S | | type A | | type W | |
| | | | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | | |
| Performance | Maximum load capacity | kg | 1,000 | | 1,250 | | 1,350 | | 1,500 | | 1,500 | | 1,500 | | 1,800 | | 1,800 | | 1,800 | | | |
| | Standard load center | mm | 500 | | 500 | | 500 | | 500 | | 500 | | 500 | | 500 | | 500 | | 500 | | | |
| | Standard lifting height | mm | E 3,000 | | 3,000 | | 3,000 | | 3,000 | | 4,000 | | 4,000 | | 3,000 | | 4,000 | | 4,000 | | | |
| | Free lift | mm | F 113 | | 113 | | 113 | | 113 | | 113 | | 995 | | 113 | | 113 | | 995 | | | |
| | Reach stroke | mm | 455 | | 440 | | 595 | | 580 | | 595 | | 580 | | 660 | | 595 | | 770 | | 705 | |
| | Tilting angle (up/down) | deg | G/H 5°/3° | | 5°/3° | | 5°/3° | | 5°/3° | | 5°/3° | | 5°/3° | | 5°/3° | | 5°/3° | | 5°/3° | | 5°/3° | |
| | Travel speed | (Laden) | km/h | 9.5 | | 9.5 | | 9.5 | | 9.0 | | 9.0 | | 9.0 | | 9.0 | | 9.0 | | 9.0 | | |
| | | (Unladen) | km/h | 11.0 | | 11.0 | | 11.0 | | 10.5 | | 10.5 | | 10.5 | | 10.5 | | 10.5 | | 10.5 | | |
| | Lifting speed | (Laden) | mm/s | 360 | | 340 | | 320 | | 310 | | 310 | | 280 | | 280 | | 280 | | 250 | | |
| | | (Unladen) | mm/s | 560 | | 560 | | 560 | | 560 | | 560 | | 470 | | 560 | | 560 | | 450 | | |
| Minimum turning radius (outer) | mm | I 1,360 | | 1,495 | | 1,495 | | 1,580 | | 1,580 | | 1,755 | | 1,755 | | 1,755 | | 1,785 | | 1,755 | | |
| Dimensions | Overall length (with fork) | mm | A+K 1,840 | | 1,855 | | 1,920 | | 1,935 | | 1,920 | | 1,935 | | 2,015 | | 2,080 | | 2,080 | | 2,145 | |
| | Overall width | mm | L 1,090 | | 1,090 | | 1,090 | | 1,090 | | 1,090 | | 1,190 | | 1,090 | | 1,090 | | 1,190 | | 1,190 | |
| | Mast lowered height | mm | B 1,995 | | 1,995 | | 1,995 | | 1,995 | | 2,495 | | 1,895 | | 1,995 | | 2,495 | | 1,895 | | 1,895 | |
| | Max mast height w/ backrest | mm | N 3,935 | | 3,935 | | 3,935 | | 3,935 | | 4,935 | | 4,925 | | 3,935 | | 4,935 | | 4,925 | | 4,925 | |
| | Head guard height | mm | M 2,240 | | 2,240 | | 2,240 | | 2,240 | | 2,240 | | 2,240 | | 2,240 | | 2,240 | | 2,240 | | 2,240 | |
| | Step height | mm | S 250 | | 250 | | 250 | | 250 | | 250 | | 250 | | 250 | | 250 | | 250 | | 250 | |
| | Fork length | mm | A 770 | | 850 | | 850 | | 920 | | 920 | | 920 | | 920 | | 920 | | 920 | | 920 | |
| | Fork spread width (maximum) | mm | D 725 | | 725 | | 725 | | 725 | | 725 | | 825 | | 725 | | 725 | | 825 | | 725 | |
| | Fork spread width (minimum) | mm | C 290 | | 290 | | 290 | | 290 | | 290 | | 290 | | 290 | | 290 | | 290 | | 290 | |
| | Wheel base | mm | O 1,110 | | 1,250 | | 1,250 | | 1,340 | | 1,340 | | 1,515 | | 1,515 | | 1,515 | | 1,515 | | 1,515 | |
| | Tread (front/rear) | mm | P/Q 980/640 | | 980/640 | | 990/640 | | 990/640 | | 990/640 | | 990/640 | | 1,090/640 | | 990/640 | | 990/640 | | 1,090/640 | |
| | Minimum ground clearance | mm | R 70 | | 70 | | 70 | | 70 | | 70 | | 70 | | 70 | | 70 | | 70 | | 70 | |
| | Vehicle weight | kg | 2,035 | | 2,095 | | 2,140 | | 2,225 | | 2,230 | | 2,315 | | 2,335 | | 2,315 | | 2,415 | | 2,435 | |
| Tires | Front wheel | | Rubber; φ255×114 | | Rubber; φ255×114 | | Urethane; φ254×102 | | Urethane; φ254×102 | | Urethane; φ254×102 | | Urethane; φ254×102 | | Urethane; φ254×102 | | Urethane; φ254×102 | | Urethane; φ254×102 | | | |
| | Drive wheel | | Rubber; φ330×145 | | Rubber; φ330×145 | | Rubber; φ330×145 | | Rubber; φ330×145 | | Rubber; φ330×145 | | Rubber; φ330×145 | | Rubber; φ330×145 | | Rubber; φ330×145 | | Rubber; φ330×145 | | | |
| | Caster wheel | | Rubber; φ150×80 | | Rubber; φ150×80 | | Rubber; φ150×80 | | Rubber; φ150×80 | | Rubber; φ150×80 | | Rubber; φ150×80 | | Rubber; φ150×80 | | Rubber; φ150×80 | | Rubber; φ150×80 | | | |
| Electrical components | Travel | Control type | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | | |
| | | Output | kW 4.5 | | 4.5 | | 4.5 | | 4.5 | | 4.5 | | 4.5 | | 4.5 | | 4.5 | | 4.5 | | | |
| | Hoist | Control type | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | FET inverter | | | |
| | | Output | kW 9.6 | | 9.6 | | 9.6 | | 9.6 | | 9.6 | | 9.6 | | 9.6 | | 9.6 | | 9.6 | | | |
| | Steering | Control type | FET chopper | | FET chopper | | FET chopper | | FET chopper | | FET chopper | | FET chopper | | FET chopper | | FET chopper | | FET chopper | | | |
| | | Output | kW 0.3 | | 0.3 | | 0.3 | | 0.3 | | 0.3 | | 0.3 | | 0.3 | | 0.3 | | 0.3 | | | |
| Rechargeable battery | Voltage × Capacity | V×Ah 48 / 201 | | 48 / 201 | | 48 / 201 | | 48 / 260 | | 48 / 280 | | 48 / 280 | | 48 / 280 | | 48 / 280 | | 48 / 280 | | | | |

*Front : Front battery removal
Side : Side battery removal

Dimension Chart

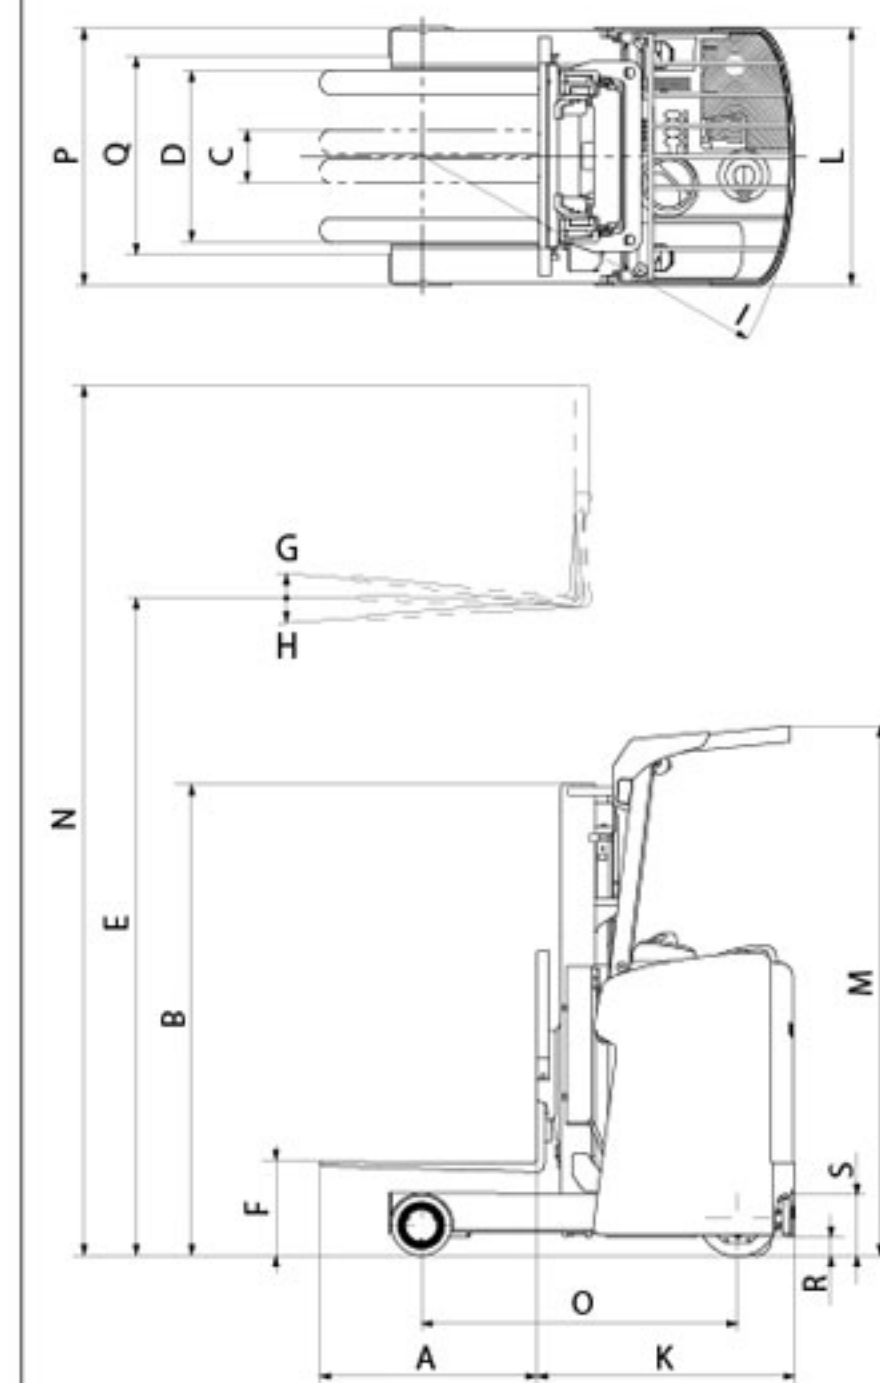

Load Capacity Charts

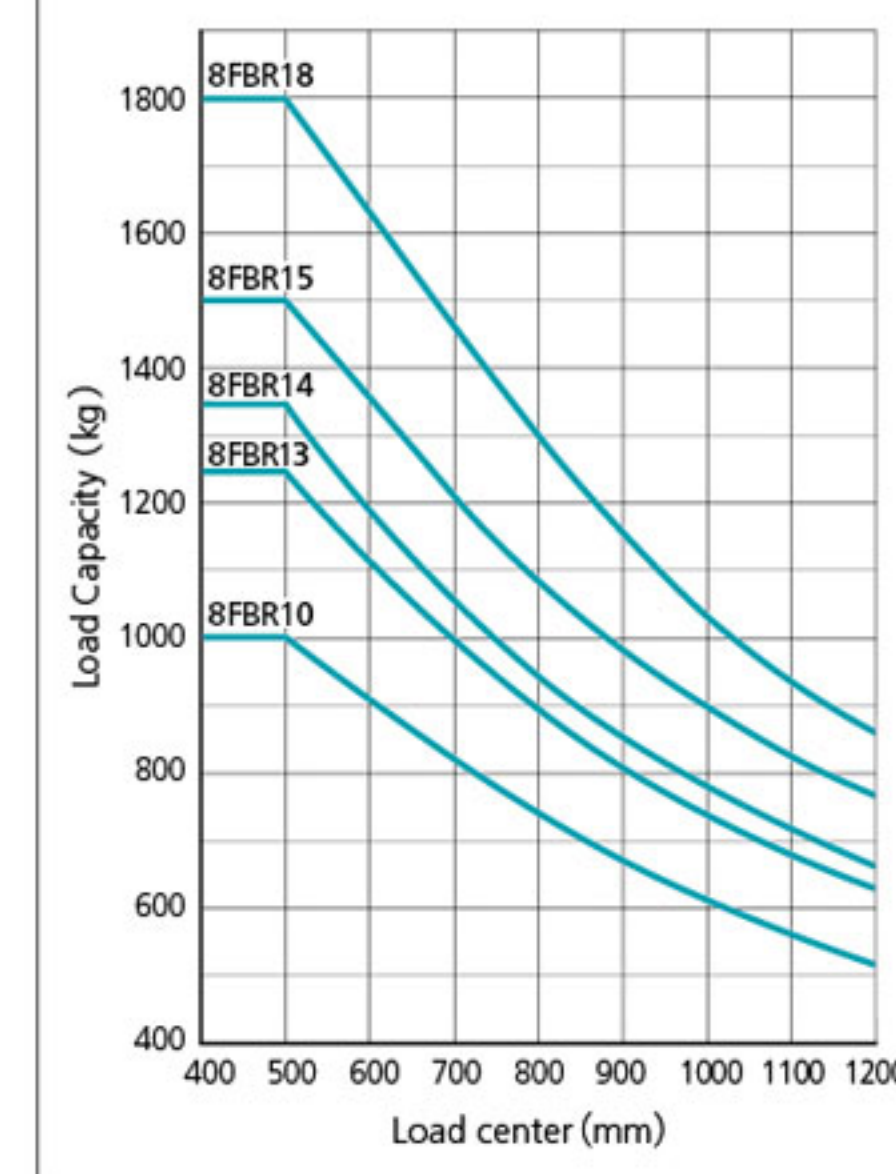

Main Accessories

| | Standard specs / accessories | Optional specs / accessories | Standard specs / accessories | | Optional specs / accessories | |
|------------------|---|--|--|---|--|--------------------------------------|
| | | | | | | |
| Hoist related | Hoist AC motor | Lift / tilt / reach-speed limiter | Safety | Neutral start | Elbow guard | |
| | Soft landing | PCS *1 | | Slope speed limiter | Rear rubber bumper | |
| | High-visibility wide mast | Simple load weight scale | | Anti-rollback | Rear bumper (floor elongation shape) | |
| | Suspension lock control | Large diameter steering wheel | | Volume adjustable type reversing buzzer | Forward/back movement chimer | |
| Steering related | AWC (small radius turning control) | | Economy | Forward/back melodic chimer | | |
| | Small diameter steering wheel | | | Display *2 | LCD display | Full function display (Full-dot LCD) |
| Travel related | Travel IPM motor | Speed limiter | Battery | BDI interrupt (stop hoisting at over discharging) | Spare battery | |
| | Neutral brake switchback regeneration | Head guard low overall height type | | Auto power off | Battery carrier | |
| Lamp related | Travel speed/power adjustment/speed limiter | | Environmental specs. | | Fisheries use spec. (Up to -10°C) | |
| | Headlights | LED headlights | | | General freezer refrigerator spec. (Up to -35°C / -45°C) | |
| | Turning indicators | LED auto lights (light sensitive type) | | | Fisheries use freezer refrigerator spec. (Up to -35°C / -45°C) | |
| | | Safety laser | | | Anti-rust spec. | |
| | | Carriage light | | | Anti-dust spec. | |
| | | LED rotating light | | | | |
| Comfortability | Low vibration suspension system | Back support | *1: Performs shock-less start to finish loading/unloading, auto-stop at maximum height, and horizontal auto-stop. *2: For the standard display/full function display function details, refer to the Cost Efficiency page (page 11). | | | |
| | Shock-less steering | High-back support | | | | |
| | Low floor | Acrylic top cover | | | | |
| | Waist band | Caster Spacer Suspension | | | | |
| Safety | Manifest clip | | | | | |
| | Turning speed control | Anti-skid traction control | | | | |
| | Travel and load handling interlock | Front protector | | | | |

Mast

| Max. lifting height (mast designation) | 1.0 ton | | 1.25 ton | | 1.35 ton | | 1.5 ton | | | | 1.8 ton | | | | | | | | | | |
|--|----------|-----------|------------|------------|----------|-----------|------------|------------|----------|-----------|------------|------------|----------|-----------|------------|------------|----------|-----------|------------|------------|---|
| | 8FBR10S | | 8FBR13S | | 8FBR14S | | 8FBR15C | | 8FBR15S | | 8FBR15A | | 8FBR15W | | 8FBR18S | | 8FBR18A | | 8FBR18W | | |
| | type S | | type S | | type S | | type C | | type S | | type A | | type W | | type S | | type A | | type W | | |
| | Standard | Semi-free | 2Full-free | 3Full-free | Standard | Semi-free | 2Full-free | 3Full-free | Standard | Semi-free | 2Full-free | 3Full-free | Standard | Semi-free | 2Full-free | 3Full-free | Standard | Semi-free | 2Full-free | 3Full-free | |
| 2,500 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 2,700 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 3,000 | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 3,300 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 3,500 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 3,700 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 4,000 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 4,300 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 4,500 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 4,700 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 5,000 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 5,500 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 6,000 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 6,500 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 7,000 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 7,500 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

Special order will be needed for the product with the mast lifting over 6,000, please feel free to contact us for detailed information.

Battery

| Battery capacity | 1.0 ton | | 1.25 ton | | 1.35 ton | | 1.5 ton | | | | 1.8 ton | | | | | | | | | |
|------------------|---------|------|----------|------|----------|------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|
| | 8FBR10S | | 8FBR13S | | 8FBR14S | | 8FBR15C | | 8FBR15S | | 8FBR15A | | 8FBR15W | | 8FBR18S | | 8FBR18A | | 8FBR18W | |
| | type S | | type S | | type S | | type C | | type S | | type A | | type W | | type S | | type A | | type W | |
| | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side | Front | Side |
| 201Ah / 5h (48V) | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 260Ah / 5h (48V) | ○ | ○ | ○ | ○ | ○ | ○ | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 280Ah / 5h (48V) | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 340Ah / 5h (48V) | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 370Ah / 5h (48V) | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

*Front : Front battery removal
Side : Side battery removal